

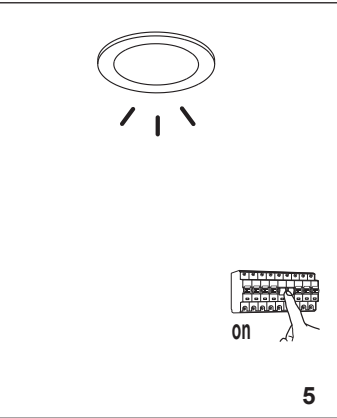
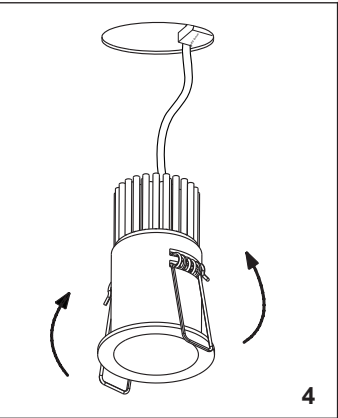
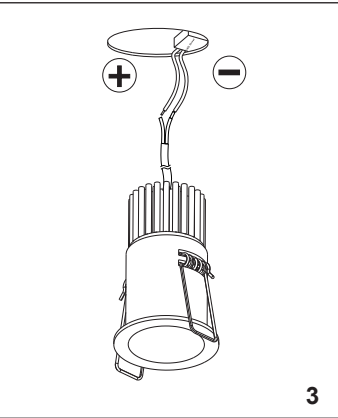
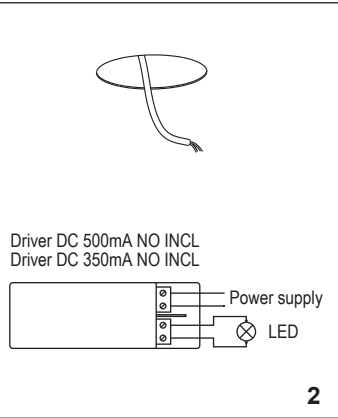
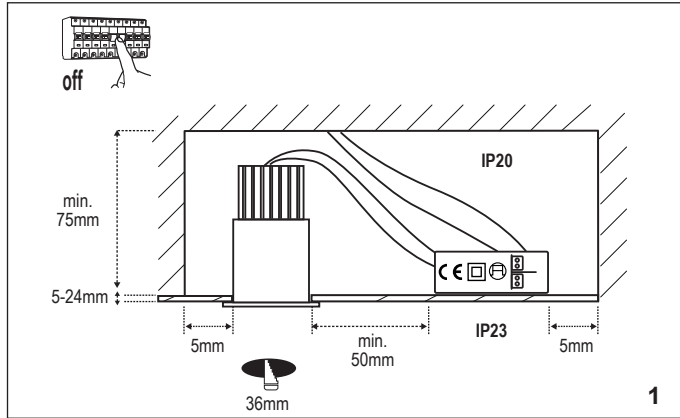
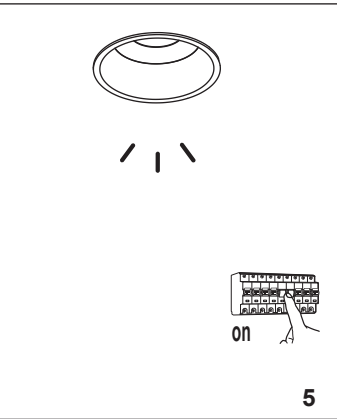
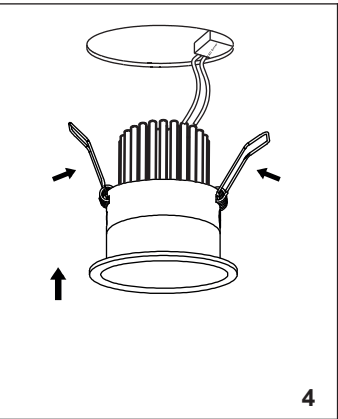
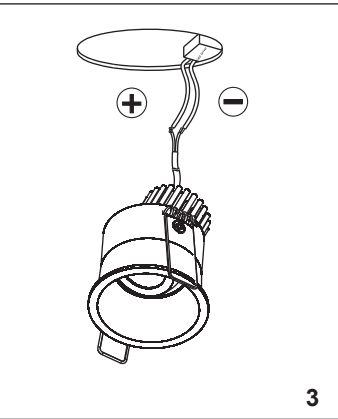


FOX RECESSED






02101001
02101002

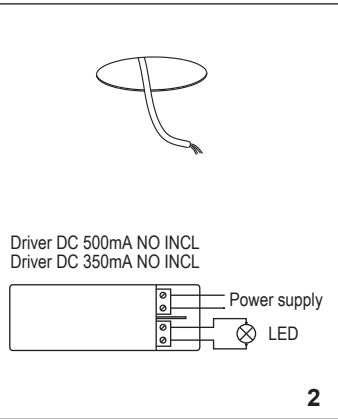

02101301
02101302
orientable

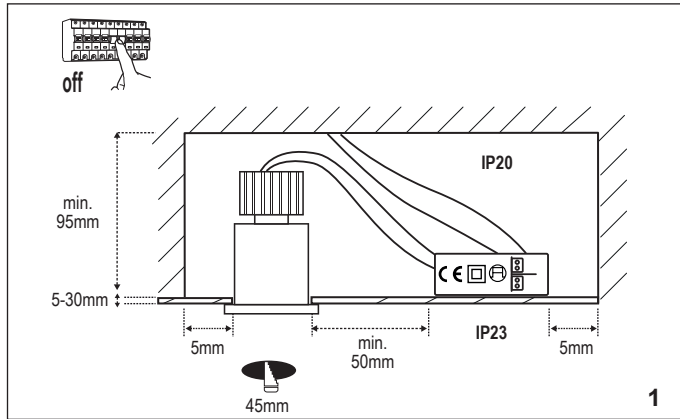

02101101
02101102
trimless

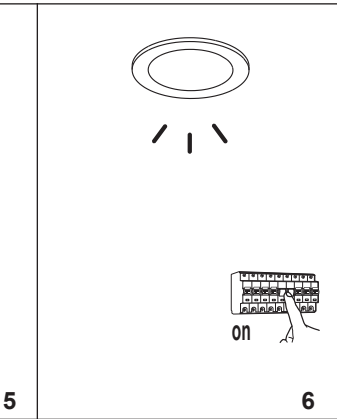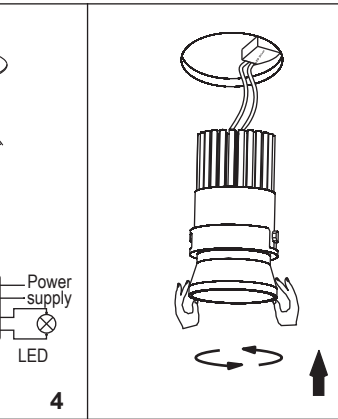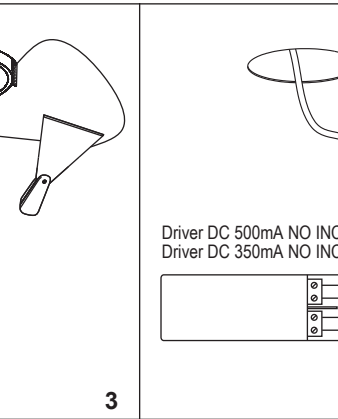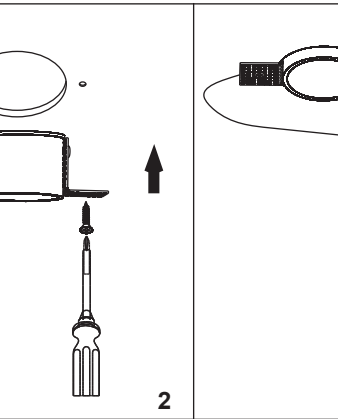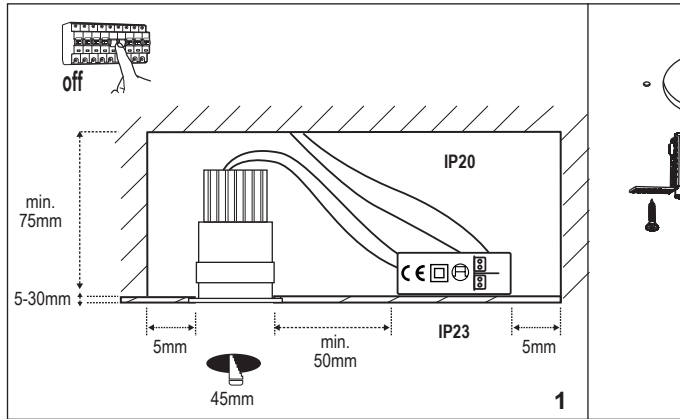

ⓘ The connection of the luminaire, should be stranded with 0.5mm²-1.5mm² conductor.

LIGHT SOURCE
COB LED 3W 248lm 2700K incl - DRIVER DC 350mA no incl
COB LED 5W 310lm 2700K incl - DRIVER DC 500mA no incl

TECHNICAL FEATURES

