

Plusminus is a versatile lighting system that takes the concept of the light rail to a new level. The conductive textile ribbon at its core allows for free placement of the luminaires and the creation of unique light solutions on the spot.



#### Luminaire finishes

- 11 Black (NCS S 8500-N)
- 13 White Grey L1 (NCS S 1000-N)
- 24 Beige M1 (NCS S 2005-Y50R)
- 37 Terra Red (NCS S 4040-Y70R)
- 42 Blue M1 (NCS S 5010-B10G)
- 53 Green M1 (NCS S 6005-G80Y)

#### LED colour temperature

2700 K / 3000 K / 3500 K.

#### Dimming control options

On/ Off.  
Simultaneous line DALI, 1-10V, Push, Casambi. Casambi integrated on each individual luminaire (P2P).

#### Electrical connection options

Surface  
Built-in  
Remote  
Plug

#### Belt

Polyester.

- Black
- Beige
- Terra Red
- Blue
- Green

#### Remarks


Maximum 30 meters length per electrical connection point.

Fire Hazard Testing. GW-960.  
Fulfills the requirements of:  
standards EN 60695-2-10:2013;  
EN 60695-2-11:2015;  
EN 60695-2-12:2011 / A1:2014

#### Installation and assembly:

Please, see the installation manual.

[www.vibia.com](http://www.vibia.com) ► **Professional area** and together with the product you'll receive a personalized installation guide with all the details of your composition and guidance for its correct and easy installation.



Sphere

360° Diffusion lighting




Ø 20 cm  
6230



Ø 30 cm  
6235

6230



Finishes

- 11 Black (NCS S 8500-N)
- 13 White Grey L1 (NCS S 1000-N)
- 24 Beige M1 (NCS S 2005-Y50R)
- 37 Terra Red (NCS S 4040-Y70R)
- 42 Blue M1 (NCS S 5010-B10G)
- 53 Green M1 (NCS S 6005-G80Y)

Materials

Diffuser: Triplex opal glass.  
Body: Aluminum.

Light Source

/1\_ LED 2700 K. CRI >90.  
/2\_ LED 3000 K. CRI >90.  
/3\_ LED 3500 K. CRI >90.  
Ⓢ  
1 x LED 7,9 W 450mA.   
846 lm. 107,09 lm/W.


Packaging

1 Box  
0,26 x 0,26 x 0,26 m.  
Vol. 0,0175 m<sup>3</sup>.  
Gross weight 1,56 Kg.  
Net weight 0,93 Kg.

Dimming control

6230\_/\_/0 On/ Off  
6230\_/\_/F Simultaneous line  
DALI, 1-10V, Push, Casambi  
6230\_/\_/Z Casambi integrated on each  
individual luminaire (P2P)

6235

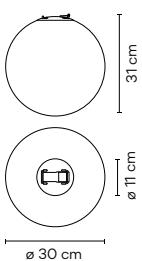

Finishes

- 11 Black (NCS S 8500-N)
- 13 White Grey L1 (NCS S 1000-N)
- 24 Beige M1 (NCS S 2005-Y50R)
- 37 Terra Red (NCS S 4040-Y70R)
- 42 Blue M1 (NCS S 5010-B10G)
- 53 Green M1 (NCS S 6005-G80Y)

Materials

Diffuser: Triplex opal glass.  
Body: Aluminum.

Light Source


/1\_ LED 2700 K. CRI >90.  
/2\_ LED 3000 K. CRI >90.  
/3\_ LED 3500 K. CRI >90.  
Ⓢ  
1 x LED 16 W 850mA.   
1492 lm. 93,25 lm/W.

Packaging

1 Box  
0,364 x 0,364 x 0,364 m.  
Vol. 0,0482 m<sup>3</sup>.  
Gross weight 2,50 Kg.  
Net weight 1,80 Kg.

Dimming control

6235\_/\_/0 On/ Off  
6235\_/\_/F Simultaneous line  
DALI, 1-10V, Push, Casambi  
6235\_/\_/Z Casambi integrated on each  
individual luminaire (P2P)

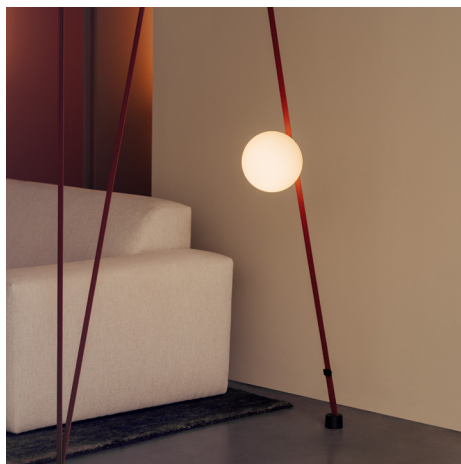

## Semisphere

Directed diffusion lighting




Ø 20 cm  
6220



Ø 30 cm  
6225

### 6220



#### Finishes

- 11 Black (NCS S 8500-N)
- 13 White Grey L1 (NCS S 1000-N)
- 24 Beige M1 (NCS S 2005-Y50R)
- 37 Terra Red (NCS S 4040-Y70R)
- 42 Blue M1 (NCS S 5010-B10G)
- 53 Green M1 (NCS S 6005-G80Y)

#### Materials

Shade: Aluminum.  
Diffuser: Polycarbonate.

#### Light Source

/1\_ LED 2700 K. CRI >90.  
/2\_ LED 3000 K. CRI >90.  
/3\_ LED 3500 K. CRI >90.  
Ⓢ  
1 x LED 7,9 W 450mA. E


#### Packaging

1 Box  
0,26 x 0,26 x 0,26 m.  
Vol. 0,0175 m<sup>3</sup>.  
Gross weight 1,20 Kg.  
Net weight 0,78 Kg.

#### Dimming control

6220\_/\_0 On/ Off  
6220\_/\_F Simultaneous line  
DALI, 1-10V, Push, Casambi  
6220\_/\_Z Casambi integrated on each  
individual luminaire (P2P)

### 6225



#### Finishes

- 11 Black (NCS S 8500-N)
- 13 White Grey L1 (NCS S 1000-N)
- 24 Beige M1 (NCS S 2005-Y50R)
- 37 Terra Red (NCS S 4040-Y70R)
- 42 Blue M1 (NCS S 5010-B10G)
- 53 Green M1 (NCS S 6005-G80Y)

#### Materials

Shade: Aluminum.  
Diffuser: Polycarbonate.

#### Light Source


/1\_ LED 2700 K. CRI >90.  
/2\_ LED 3000 K. CRI >90.  
/3\_ LED 3500 K. CRI >90.  
Ⓢ  
1 x LED 16 W 850mA. F

#### Packaging

1 Box  
0,364 x 0,364 x 0,364 m.  
Vol. 0,0482 m<sup>3</sup>.  
Gross weight 2 Kg.  
Net weight 1,5 Kg.

#### Dimming control

6225\_/\_0 On/ Off  
6225\_/\_F Simultaneous line  
DALI, 1-10V, Push, Casambi  
6225\_/\_Z Casambi integrated on each  
individual luminaire (P2P)

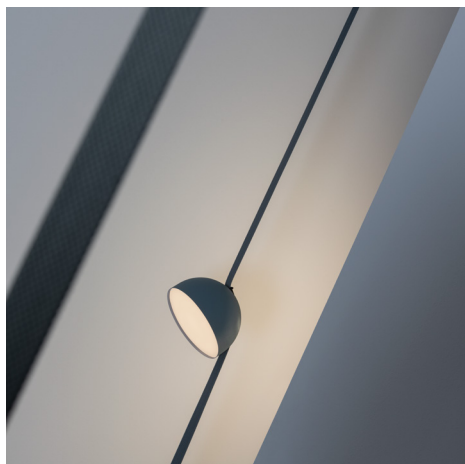

Cone

Directed diffusion lighting




Ø 60 cm  
6240




Ø 80 cm  
6245

6240




Finishes

-  11 Black (NCS S 8500-N)
-  13 White Grey L1 (NCS S 1000-N)
-  24 Beige M1 (NCS S 2005-Y50R)
-  37 Terra Red (NCS S 4040-Y70R)
-  42 Blue M1 (NCS S 5010-B10G)
-  53 Green M1 (NCS S 6005-G80Y)

Materials

Shade: Aluminum.  
Diffuser: Triplex opal glass.

Light Source

/1\_ LED 2700 K. CRI >90.  
/2\_ LED 3000 K. CRI >90.  
/3\_ LED 3500 K. CRI >90.  
  
1 x LED 16 W 850mA.   
1492 lm. 93,25 lm/W.

Packaging


1 Box  
0,727 x 0,727 x 0,32 m.  
Vol. 0,1691 m<sup>3</sup>.  
Gross weight 5 Kg.  
Net weight 2,5 Kg.

Dimming control




6240\_/\_0 On/ Off  
6240\_/\_F Simultaneous line  
DALI, 1-10V, Push, Casambi  
6240\_/\_Z Casambi integrated on each  
individual luminaire (P2P)

6245

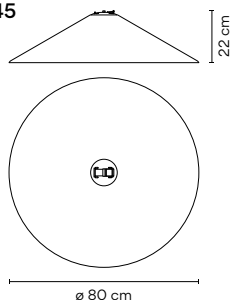



Finishes

-  11 Black (NCS S 8500-N)
-  13 White Grey L1 (NCS S 1000-N)
-  24 Beige M1 (NCS S 2005-Y50R)
-  37 Terra Red (NCS S 4040-Y70R)
-  42 Blue M1 (NCS S 5010-B10G)
-  53 Green M1 (NCS S 6005-G80Y)

Materials

Shade: Aluminum.  
Diffuser: Triplex opal glass.

Light Source

/1\_ LED 2700 K. CRI >90.  
/2\_ LED 3000 K. CRI >90.  
/3\_ LED 3500 K. CRI >90.  
  
1 x LED 16 W 850mA.   
1492 lm. 93,25 lm/W.


Packaging

1 Box  
0,96 x 0,96 x 0,27 m.  
Vol. 0,2488 m<sup>3</sup>.  
Gross weight 7 Kg.  
Net weight 3,5 Kg.

Dimming control

6245\_/\_0 On/ Off  
6245\_/\_F Simultaneous line  
DALI, 1-10V, Push, Casambi  
6245\_/\_Z Casambi integrated on each  
individual luminaire (P2P)



      

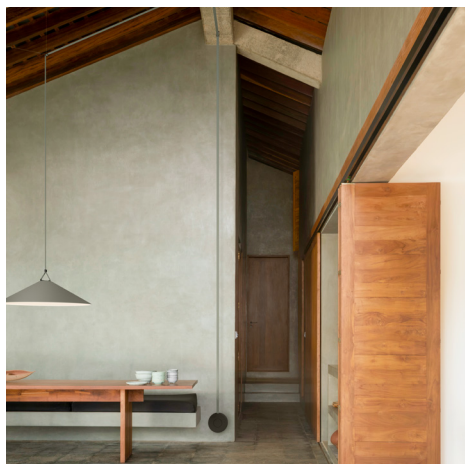



Spotlight

Accent lighting



12°



6200



Ø 10 cm

6200

Medium flood 24°




6205



Ø 10 cm


6205 6210

Wide flood 55°



6210

6200

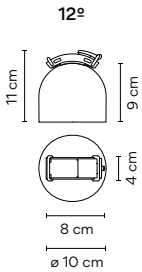

Finishes

- 11 Black (NCS S 8500-N)
- 13 White Grey L1 (NCS S 1000-N)
- 24 Beige M1 (NCS S 2005-Y50R)
- 37 Terra Red (NCS S 4040-Y70R)
- 42 Blue M1 (NCS S 5010-B10G)
- 53 Green M1 (NCS S 6005-G80Y)

Materials

Shade: Aluminum.  
Diffuser: Polycarbonate.

Light Source

/1\_ LED 2700 K. CRI >90.  
/2\_ LED 3000 K. CRI >90.  
/3\_ LED 3500 K. CRI >90.  
Ⓢ  
1 x LED 7,9 W 450mA.   
916 lm. 115,95 lm/W.

Packaging

1 Box  
0,193 x 0,161 x 0,148 m.  
Vol. 0,0046 m³.  
Gross weight 0,719 Kg.  
Net weight 0,51 Kg.


Dimming control

6200\_/\_/0 On/ Off  
6200\_/\_/F Simultaneous line  
DALI, 1-10V, Push, Casambi  
6200\_/\_/Z Casambi integrated on each  
individual luminaire (P2P)



6205

Medium flood 24°



Finishes

- 11 Black (NCS S 8500-N)
- 13 White Grey L1 (NCS S 1000-N)
- 24 Beige M1 (NCS S 2005-Y50R)
- 37 Terra Red (NCS S 4040-Y70R)
- 42 Blue M1 (NCS S 5010-B10G)
- 53 Green M1 (NCS S 6005-G80Y)

Materials

Shade: Aluminum.  
Diffuser: Polycarbonate.

Light Source

/1\_ LED 2700 K. CRI >90.  
/2\_ LED 3000 K. CRI >90.  
/3\_ LED 3500 K. CRI >90.  
Ⓢ  
1 x LED 7,9 W 450mA.   
916 lm. 115,95 lm/W.

Packaging

1 Box  
0,193 x 0,161 x 0,148 m.  
Vol. 0,0046 m³.  
Gross weight 0,719 Kg.  
Net weight 0,51 Kg.


Dimming control

6205\_/\_/0 On/ Off  
6205\_/\_/F Simultaneous line  
DALI, 1-10V, Push, Casambi  
6205\_/\_/Z Casambi integrated on each  
individual luminaire (P2P)



6210

Wide flood 55°



Finishes

- 11 Black (NCS S 8500-N)
- 13 White Grey L1 (NCS S 1000-N)
- 24 Beige M1 (NCS S 2005-Y50R)
- 37 Terra Red (NCS S 4040-Y70R)
- 42 Blue M1 (NCS S 5010-B10G)
- 53 Green M1 (NCS S 6005-G80Y)

Materials

Shade: Aluminum.  
Diffuser: Polycarbonate.

Light Source

/1\_ LED 2700 K. CRI >90.  
/2\_ LED 3000 K. CRI >90.  
/3\_ LED 3500 K. CRI >90.  
Ⓢ  
1 x LED 7,9 W 450mA.   
916 lm. 115,95 lm/W.

Packaging

1 Box  
0,193 x 0,161 x 0,148 m.  
Vol. 0,0046 m³.  
Gross weight 0,719 Kg.  
Net weight 0,51 Kg.



Dimming control

6210\_/\_/0 On/ Off  
6210\_/\_/F Simultaneous line  
DALI, 1-10V, Push, Casambi  
6210\_/\_/Z Casambi integrated on each  
individual luminaire (P2P)



Spotlight


Directed diffusion lighting



Ø 10 cm  
6215

6215

Directed diffusion lighting



Finishes

- 11 Black (NCS S 8500-N)
- 13 White Grey L1 (NCS S 1000-N)
- 24 Beige M1 (NCS S 2005-Y50R)
- 37 Terra Red (NCS S 4040-Y70R)
- 42 Blue M1 (NCS S 5010-B10G)
- 53 Green M1 (NCS S 6005-G80Y)

Materials

Shade: Aluminum.  
Diffuser: Polycarbonate.

Light Source


/1\_ LED 2700 K. CRI >90.  
/2\_ LED 3000 K. CRI >90.  
/3\_ LED 3500 K. CRI >90.  
Ⓢ  
1 x LED 4,2 W 250mA.   
491 lm. 116,9 lm/W.

Packaging

1 Box  
0,193 x 0,161 x 0,148 m.  
Vol. 0,0046 m³.  
Gross weight 0,719 Kg.  
Net weight 0,51 Kg.


Dimming control

6215\_/\_/0 On/ Off  
6215\_/\_/F Simultaneous line  
DALI, 1-10V, Push, Casambi  
6215\_/\_/Z Casambi integrated on each  
individual luminaire (P2P)

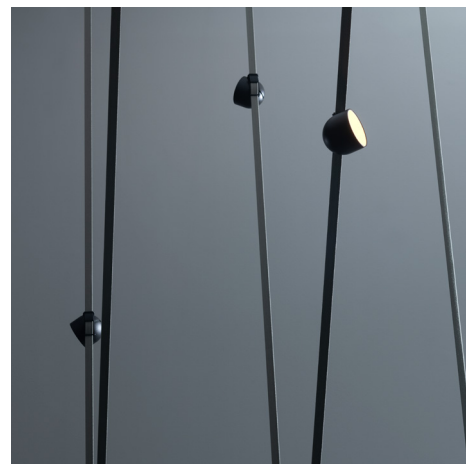

## Linear Diffuser



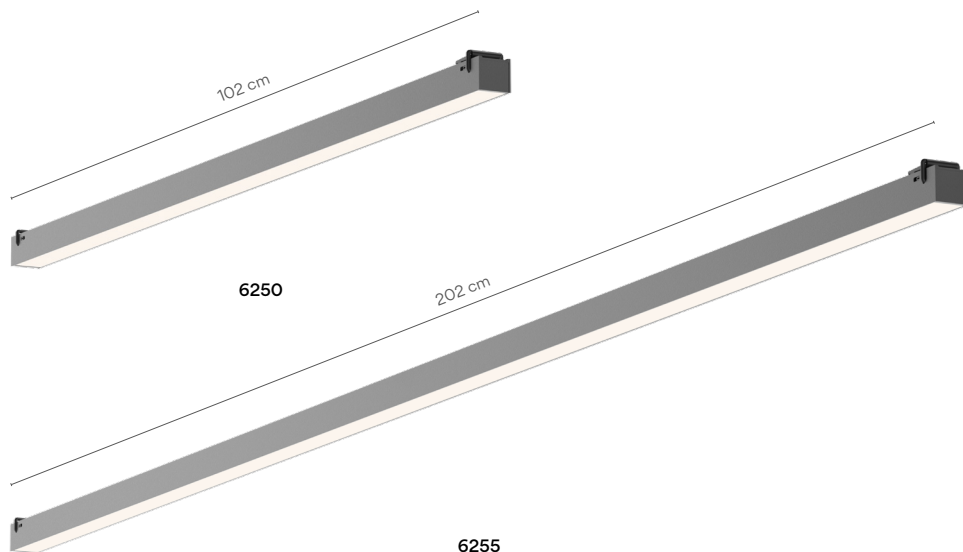



### General lighting



### 6250




#### Finishes

-  11 Black (NCS S 8500-N)
-  13 White Grey L1 (NCS S 1000-N)
-  24 Beige M1 (NCS S 2005-Y50R)
-  37 Terra Red (NCS S 4040-Y70R)
-  42 Blue M1 (NCS S 5010-B10G)
-  53 Green M1 (NCS S 6005-G80Y)

#### Light Source

- /1\_ LED 2700 K. CRI >90.
- /2\_ LED 3000 K. CRI >90.
- /3\_ LED 3500 K. CRI >90.

1 x LED STRIP 20,6W 24V. 

2544 lm. 123,3 lm/W.

#### Materials

Shade: Aluminum.  
Diffuser: Polycarbonate.

#### Packaging

1 Box  
0,06 x 0,06 x 1,25 m.  
Vol. 0,0057 m<sup>3</sup>.  
Gross weight 1,5 Kg.  
Net weight 0,72 Kg.

#### Dimming control

6250\_/\_/0 On/ Off

6250\_/\_/F Simultaneous line  
DALI, 1-10V, Push, Casambi







6250\_/\_/Z Casambi integrated on each  
individual luminaire (P2P)



### 6255




#### Finishes

-  11 Black (NCS S 8500-N)
-  13 White Grey L1 (NCS S 1000-N)
-  24 Beige M1 (NCS S 2005-Y50R)
-  37 Terra Red (NCS S 4040-Y70R)
-  42 Blue M1 (NCS S 5010-B10G)
-  53 Green M1 (NCS S 6005-G80Y)

#### Light Source

- /1\_ LED 2700 K. CRI >90.
- /2\_ LED 3000 K. CRI >90.
- /3\_ LED 3500 K. CRI >90.

1 x LED STRIP 41,3 W 24V. 

5088 lm. 123,3 lm/W.

#### Materials

Shade: Aluminum.  
Diffuser: Polycarbonate.

#### Packaging


1 Box  
0,06 x 0,06 x 2,24 m.  
Vol. 0,0103 m<sup>3</sup>.  
Gross weight 2 Kg.  
Net weight 1,45 Kg.

#### Dimming control

6255\_/\_/0 On/ Off



6255\_/\_/F Simultaneous line  
DALI, 1-10V, Push, Casambi

6255\_/\_/Z Casambi integrated on each  
individual luminaire (P2P)

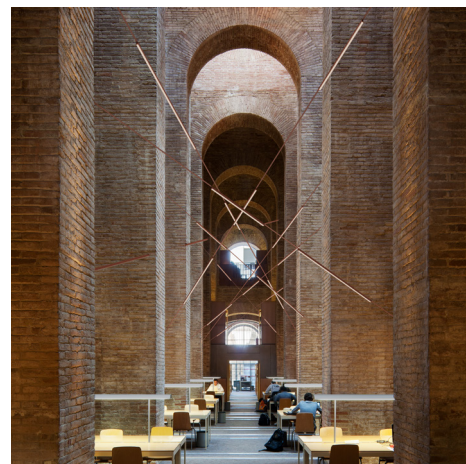


Linear Low UGR - High-Comfort

High-comfort,  
low-glare general linear lighting

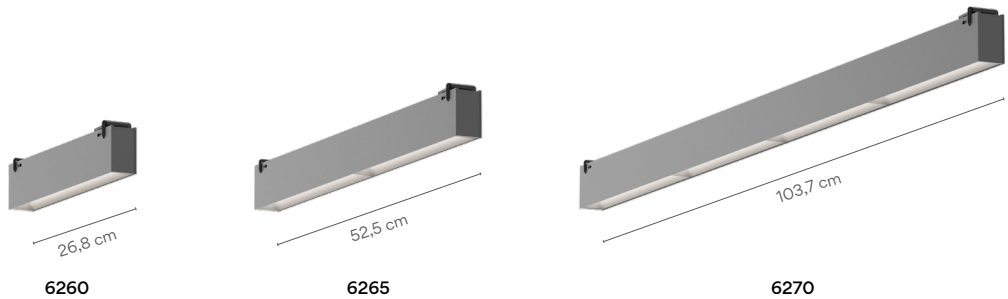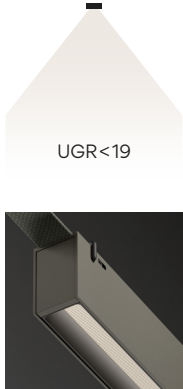

6260




- Finishes**
- 11 Black (NCS S 8500-N)
  - 13 White Grey L1 (NCS S 1000-N)
  - 24 Beige M1 (NCS S 2005-Y50R)
  - 37 Terra Red (NCS S 4040-Y70R)
  - 42 Blue M1 (NCS S 5010-B10G)
  - 53 Green M1 (NCS S 6005-G80Y)

**Light Source**

/1\_ LED 2700 K. CRI >90.  
/2\_ LED 3000 K. CRI >90.  
/3\_ LED 3500 K. CRI >90.

---

1 x LED STRIP 10,3W 24V. 

1336 lm. 132,43 lm/W.

UGR <19.

**Materials**

Shade: Aluminum.  
Diffuser: PET.

**Packaging**

1 Box  
0,08 x 0,11 x 0,32 m.  
Vol. 0,0028 m<sup>3</sup>.  
Gross weight 0,8 Kg.  
Net weight 0,41 Kg.

**Dimming control**

6260\_/\_/0 On/ Off







---

6260\_/\_/F Simultaneous line  
DALI, 1-10V, Push, Casambi


---

6260\_/\_/Z Casambi integrated on each  
individual luminaire (P2P)

---

6265




- Finishes**
- 11 Black (NCS S 8500-N)
  - 13 White Grey L1 (NCS S 1000-N)
  - 24 Beige M1 (NCS S 2005-Y50R)
  - 37 Terra Red (NCS S 4040-Y70R)
  - 42 Blue M1 (NCS S 5010-B10G)
  - 53 Green M1 (NCS S 6005-G80Y)

**Light Source**

/1\_ LED 2700 K. CRI >90.  
/2\_ LED 3000 K. CRI >90.  
/3\_ LED 3500 K. CRI >90.

---

1 x LED STRIP 20,6W 24V. 

2731 lm. 132,3 lm/W.

UGR <19.

**Materials**

Shade: Aluminum.  
Diffuser: PET.

**Packaging**

1 Box  
0,08 x 0,11 x 0,57 m.  
Vol. 0,0050 m<sup>3</sup>.  
Gross weight 1,5 Kg.  
Net weight 0,89 Kg.

**Dimming control**

6265\_/\_/0 On/ Off







---

6265\_/\_/F Simultaneous line  
DALI, 1-10V, Push, Casambi


---

6265\_/\_/Z Casambi integrated on each  
individual luminaire (P2P)

---

6270

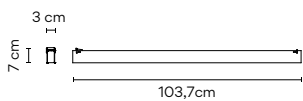


- Finishes**
- 11 Black (NCS S 8500-N)
  - 13 White Grey L1 (NCS S 1000-N)
  - 24 Beige M1 (NCS S 2005-Y50R)
  - 37 Terra Red (NCS S 4040-Y70R)
  - 42 Blue M1 (NCS S 5010-B10G)
  - 53 Green M1 (NCS S 6005-G80Y)

**Light Source**

/1\_ LED 2700 K. CRI >90.  
/2\_ LED 3000 K. CRI >90.  
/3\_ LED 3500 K. CRI >90.

---

1 x LED STRIP 41,3W 24V. 

5462 lm. 132,3 lm/W.

UGR <19.

**Materials**

Shade: Aluminum.  
Diffuser: PET.

**Packaging**

1 Box  
0,08 x 0,11 x 1,10 m.  
Vol. 0,0096 m<sup>3</sup>.  
Gross weight 2,5 Kg.  
Net weight 1,5 Kg.

**Dimming control**

6270\_/\_/0 On/ Off







---

6270\_/\_/F Simultaneous line  
DALI, 1-10V, Push, Casambi

---

6270\_/\_/Z Casambi integrated on each  
individual luminaire (P2P)


---




Linear Low UGR - High-Efficiency





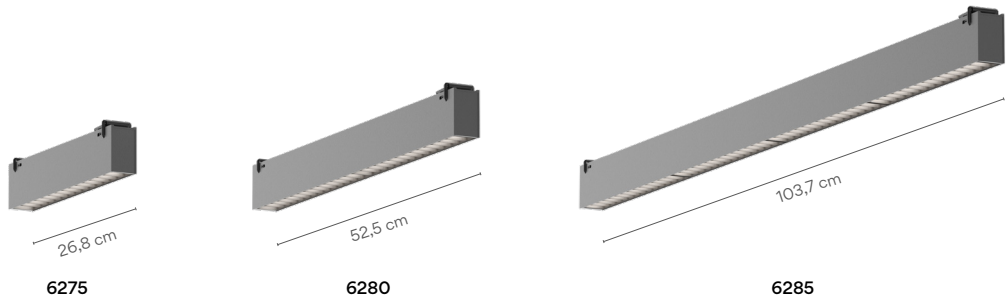

High-efficiency,  
low-glare general linear lighting



6275




Finishes

-  11 Black (NCS S 8500-N)
-  13 White Grey L1 (NCS S 1000-N)
-  24 Beige M1 (NCS S 2005-Y50R)
-  37 Terra Red (NCS S 4040-Y70R)
-  42 Blue M1 (NCS S 5010-B10G)
-  53 Green M1 (NCS S 6005-G80Y)

Light Source

- /1\_ LED 2700 K. CRI >90.
- /2\_ LED 3000 K. CRI >90.
- /3\_ LED 3500 K. CRI >90.

1 x LED STRIP 10,3W 24V. 

UGR <19.

Materials

Shade: Aluminum.

Packaging

1 Box  
0,08 x 0,11 x 0,32 m.  
Vol. 0,0028 m<sup>3</sup>.  
Gross weight 0,8 Kg.  
Net weight 0,41 Kg.

Dimming control


6275\_/\_/0 On/ Off

6275\_/\_/F Simultaneous line  
DALI, 1-10V, Push, Casambi





6275\_/\_/Z Casambi integrated on each  
individual luminaire (P2P)



6280




Finishes

-  11 Black (NCS S 8500-N)
-  13 White Grey L1 (NCS S 1000-N)
-  24 Beige M1 (NCS S 2005-Y50R)
-  37 Terra Red (NCS S 4040-Y70R)
-  42 Blue M1 (NCS S 5010-B10G)
-  53 Green M1 (NCS S 6005-G80Y)

Light Source

- /1\_ LED 2700 K. CRI >90.
- /2\_ LED 3000 K. CRI >90.
- /3\_ LED 3500 K. CRI >90.

1 x LED STRIP 20,6W 24V. 

UGR <19.

Materials

Shade: Aluminum.

Packaging

1 Box  
0,08 x 0,11 x 0,57 m.  
Vol. 0,0050 m<sup>3</sup>.  
Gross weight 1,5 Kg.  
Net weight 0,89 Kg.

Dimming control


6280\_/\_/0 On/ Off

6280\_/\_/F Simultaneous line  
DALI, 1-10V, Push, Casambi

6280\_/\_/Z Casambi integrated on each  
individual luminaire (P2P)



6285

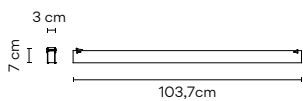


Finishes

-  11 Black (NCS S 8500-N)
-  13 White Grey L1 (NCS S 1000-N)
-  24 Beige M1 (NCS S 2005-Y50R)
-  37 Terra Red (NCS S 4040-Y70R)
-  42 Blue M1 (NCS S 5010-B10G)
-  53 Green M1 (NCS S 6005-G80Y)

Light Source

- /1\_ LED 2700 K. CRI >90.
- /2\_ LED 3000 K. CRI >90.
- /3\_ LED 3500 K. CRI >90.

1 x LED STRIP 41,3W 24V. 

UGR <19.

Materials

Shade: Aluminum.

Packaging

1 Box  
0,08 x 0,11 x 1,10 m.  
Vol. 0,0096 m<sup>3</sup>.  
Gross weight 2,5 Kg.  
Net weight 1,5 Kg.

Dimming control

6285\_/\_/0 On/ Off

6285\_/\_/F Simultaneous line  
DALI, 1-10V, Push, Casambi

6285\_/\_/Z Casambi integrated on each  
individual luminaire (P2P)



## Accessories Toolbox

Thought out to the smallest detail. Receive your personalised accessories toolbox for a quick and easy installation.



## Electrical connection options


Choose your preferred installation option according to your needs.



Surface




Built-in



Remote  
Built-in



Surface



Plug



Optional wire  
connector


## Dimming control options

Choose your preferred installation option according to your needs.

### Dimming Control

### Electrical Connection

	Surface 25 - 240 W	Built-in 25 - 240 W	Remote 25 - 240 W	Plug Max 60W
On / Off	✓	✓	✓	✓
Push Switch	—	—	—	✓
Push Simultaneous	✓	✓	✓	—
1-10V Simultaneous	✓	✓	✓	—
DALI Simultaneous	✓	✓	✓	—
Casambi Simultaneous	✓	✓	✓	—
Casambi integrated on each individual luminaire (P2P)	✓	✓	✓	✓




**Surface Canopy S**  
E1 Ø 205 mm.  
**Wattage options:**  
<60W.

**Driver** Constant Voltage 42V.  
90-305 VAC. 100~240V. 50/60Hz.  
**Dimming options:**  
On/ Off.  
Simultaneous line DALI / 1-10V / Push / Casambi.  
Casambi integrated on each individual luminaire (P2P).

**Body:** ABS.  
Net weight 0,9 Kg.

**11 Black**  
(NCS S 8500-N)




**Surface Canopy M**  
E2 Ø 260 mm.  
**Wattage options:**  
>60W.  
<240W.

**Driver** Constant Voltage 42V.  
90-305 VAC. 100~240V. 50/60Hz.

**Dimming options:**  
On/ Off.  
Simultaneous line DALI / 1-10V / Push / Casambi.  
Casambi integrated on each individual luminaire (P2P).

**Body:** ABS.  
Net weight 1,8 Kg.

**11 Black**  
(NCS S 8500-N)




**Built-in Canopy**  
E3 Ø 120 mm.  
**Wattage options:**  
>25W.  
<240W.

**Driver** Constant Voltage 42V.  
90-305 VAC. 100~240V. 50/60Hz.

**Dimming options:**  
On/ Off.  
Simultaneous line DALI / 1-10V / Push / Casambi.  
Casambi integrated on each individual luminaire (P2P).

**Body:** ABS.  
Net weight 1,08 - 1,860 Kg.

**11 Black**  
(NCS S 8500-N)




**Remote Built-in Canopy**  
E4 Ø 110 mm.  
**Wattage options:**  
>25W.  
<240W.

**Driver** Constant Voltage 42V.  
90-305 VAC. 100~240V. 50/60Hz.

**Dimming options:**  
On/ Off.  
Simultaneous line DALI / 1-10V / Push / Casambi.  
Casambi integrated on each individual luminaire (P2P).

**Body:** ABS.  
Net weight 0,87 - 1,65 Kg.

**11 Black**  
(NCS S 8500-N)




**Remote Surface Canopy**  
E5 Ø 60 mm.  
**Wattage options:**  
>25W.  
<240W.

**Driver** Constant Voltage 42V.  
90-305 VAC. 100~240V. 50/60Hz.

**Dimming options:**  
On/ Off.  
Simultaneous line DALI / 1-10V / Push / Casambi.  
Casambi integrated on each individual luminaire (P2P).

**Body:** Aluminum.  
Net weight 0,95 - 1,73 Kg.

**11 Black**  
(NCS S 8500-N)




**Plug-in Floor Switch**  
E6 Ø 90 mm.  
**Wattage options:**  
<60W.

**Driver** Constant Voltage 42V.  
90-305 VAC. 100~240V. 50/60Hz.

**Dimming options:**  
On/ Off.  
Push.  
Casambi P2P.

**Body:** ABS.

**11 Black**  
(NCS S 8500-N)



**Wire Connector**  
E8 Ø 3,1 mm.  
**Wattage options:**  
< 60W.

**Driver** Constant Voltage 42V.  
90-305 VAC. 50/60Hz.

**Body:** ABS.

**11 Black**  
(NCS S 8500-N)



**Wire connector**  
E8 Ø 5,8 mm.  
**Wattage options:**  
< 60W.  
<240W.

All of our products come with a five-year warranty. Check our legal terms at [www.vibia.com/warranty](http://www.vibia.com/warranty)