

STRIPES

designed by
FERNANDO MARTÍNEZ

STRIPES

Diseño vanguardista en metacrilato sobre marco de aluminio de líneas perpendiculares de las que emana una gran potencia lumínica para crear formas de luz propia combinando sus franjas en distintas posiciones. Colección en empotrable, panel y plafón de LED, con la posibilidad de crear "formas de luz" en variadas combinaciones.

STRIPES

Avant-garde design in methacrylate on an aluminium frame with perpendicular lines from which a great luminous power emanates. Possibility of generating own compositions combining the different positions. Recessed collection, panel and LED ceiling, which can create original "light forms".



STRIPES 1629/23 1629/59

REF.
1629/23

DOWNLIGHT
IP43ext IP20int

MATERIAL
Aluminio y metacrilato/
Aluminium & PMMA

ACABADO/ FINISH

Bisel: blanco mate /
Frame: matt white
Difusor: blanco brillo/
Diffuser: shiny white


INSTALACIÓN/ INSTALLATION

PCB LED 20W 700mA
CRI>80

- Cálida/ *Warm* 3000K 1145lm
- Neutra/ *Neutral* 4000K 1414lm

Ⓟ dim 1-10V Ⓛ dim DALI Ⓟ dim PUSH Ⓛ dim L,C

EEI: **A**



REF.
1629/59

PANEL/ RECESSED CEILING PANEL
IP43ext IP20int

MATERIAL
Aluminio y metacrilato/
Aluminium & PMMA

ACABADO/ FINISH

Bisel: blanco mate o negro mate/
Frame: matt white or matt black
Difusor blanco brillo o negro mate/
Diffuser: shiny white or matt black

INSTALACIÓN/ INSTALLATION



PCB LED 45W 500mA
CRI>80

- Cálida/ *Warm* 3000K 5073lm
- Neutra/ *Neutral* 4000K 5314lm

Ⓟ dim DALI Ⓟ dim PUSH

EEI: **A**

Fácil rotación manual de los módulos/
Easy manual rotation of the panel

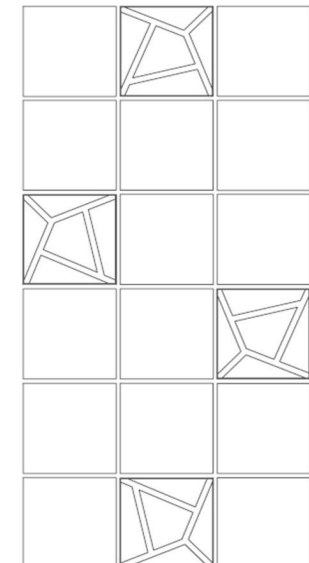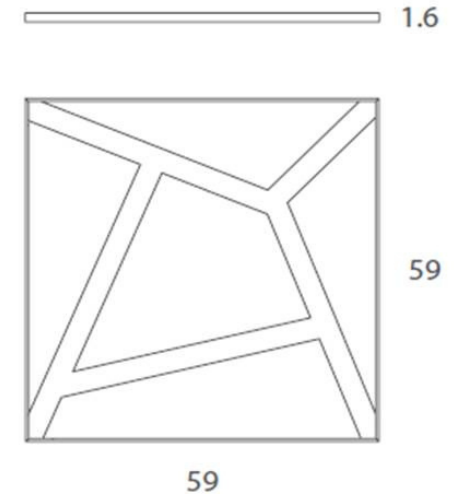

STRIPES 26629/59

REF.

26629/59

PLAFÓN/ SURFACE LIGHT

IP43ext IP20int

MATERIAL

Aluminio y metacrilato/
Aluminium & PMMA

ACABADO/ FINISH

Bisel: blanco mate o negro mate/
Frame: matt white or matt black

Difusor blanco brillo o negro mate/
Diffuser: shiny white or matt black

Difusor blanco brillo o negro mate/
Diffuser: shiny white or matt black

Difusor blanco brillo o negro mate/
Diffuser: shiny white or matt black

INSTALACIÓN/ INSTALLATION

PCB LED 45W 500mA


CRI>80

- Cálida/ *Warm* 3000K 5073lm


- Neutra/ *Neutral* 4000K 5314lm

ⓓ dim DALI Ⓟ dim PUSH

EEI: **A**



59

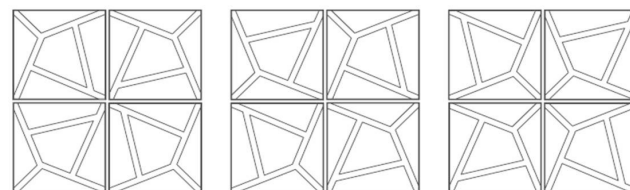

Fácil rotación manual de los módulos/
Easy manual rotation of the panel

Easy manual rotation of the panel

